


Emergency gear
DIN version

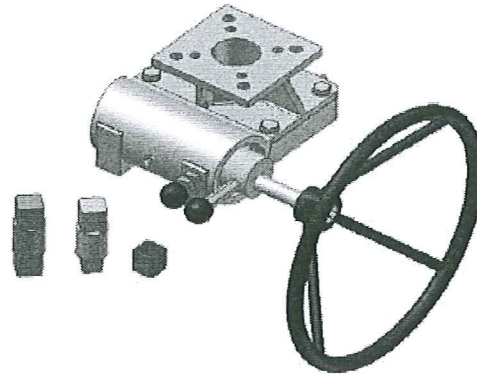

Technical datas

	Type 1	Type 2	Type 3	Type 4
torque (input) /Nm	25	80	100	200
torque (output) /Nm	200	650	1600	3600
double flange to actuator	F05/F07	F07/F10	F10/F14	F16/F25
double flange to valve	F05/F07	F07/F10	F10/F14	F16/F25
temperature	-20°C to 80°C			
angle	0 - 90°			
adjust limit stops	10° to each end position			
weight/kg	1,7	3,7	9,5	35

Description

All emergency gears have generally a double flange to the actuator and valve.

Scope of supply:

- 1 x REVO emergency gear
- 2 x couplings to adapt square to the actuator
- 1 x adapt sleeve to adapt square to the valve
- 1 x hand wheel
- 1 x screw kit emergency gear / actuator
- 1 x screw kit emergency gear / valve

Order no.

RZGAT01-DU

RZGAT02-DU

RZGAT03-DU

RZGAT04-DU