


SINGLE SEAT TWO WAY CONTROL VALVES – LOW NOISE CE

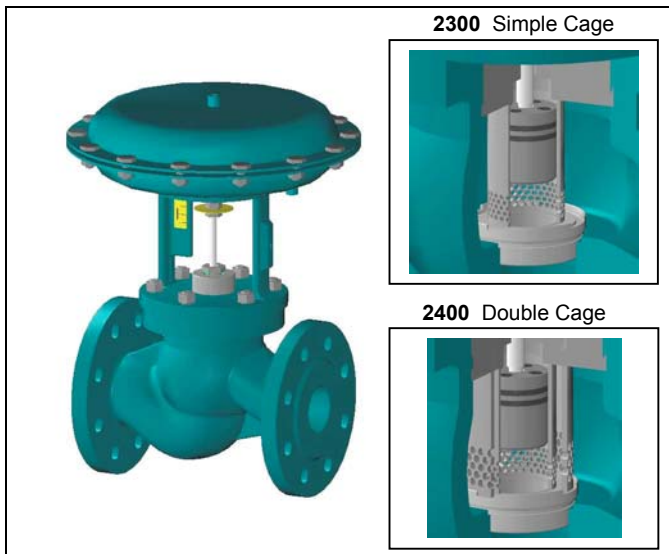

TYPE **2300 AD** Simple Cage

TYPE **2400 AD** Double Cage

Normally open – air closes

Face-to-face EN 558-1

DESCRIPTION

The "UNIWORLD" series type 2300/2400 AD are equipped with EN "straight-through" pattern bodies with EN flanges.

Modulating balanced piston plug (low-noise), sliding in a single or double cage for control of virtually all line media.

Compact construction assembled with multisprings pneumatic actuator having 3-15 psi ... 6-30 psi standard control signals.

On request can be equipped with a pneumatic or electro-pneumatic pilot positioner.

SIZES : from DN 65 to DN 100

BODY CONNECT. : flanged EN 1092-1 PN 16 PN 40

MATERIALS OF BODY GROUP (1) :

- **Cast iron EN-GJL-250 UNI EN 1561 PN 16**
AISI 316 st. st. trim - C40 nickel plated steel bonnet
- **Carbon steel 1.0619 PN 16 ... PN 40**
AISI 316 st. st. trim - C40 nickel plated steel bonnet
- **Stainless steel AISI 316 1.4408 PN 16 ... PN 40**
AISI 316 st. st. trim – AISI 316 st. st. bonnet

PLUG :

- **SIMPLE CAGE** = linear balanced class IV°
- **RANGEABILITY DN 65/100** = 1/100

BONNET (2) :

- Standard : -5 to +200 °C
- Finned : > 200 °C
- Extended : below -5 °C
- Bellows sealed : for thermal oil or hazardous media with (PN 16 - 25 - 40) standard safety gland arrangement

GLAND ARRANGEMENT (PACKING) (3) with safety "0-rings" :

- PTFE 100% for temperatures ≤ 150 °C
- PTFE 85% + GRAPHITE 15% for temperatures ≤ 200 °C
- PURE GRAPHITE 100% for temperatures from 200° to 400 °C to be used with finned bonnet

CV = american unit (flowrate in USGPM with 1 psi of differential pressure)

TECHNICAL CHARACTERISTICS OF PNEUMATIC ACTUATOR :

- Actuator : diaphragm type
- Control signals : 3-15 psi ... 6-30 psi
- Max air supply pressure : 35 psi (2,5 bar)
- Ambient temperature : -20 ... +70 °C
- Actuator casings material : Fe P11 carbon steel
- Diaphragm material : EPDM 70
- Yoke material : GGG 50 Spheroidal cast iron
- Pneumatic connections : ISO 7 Rp – 1/8"

MAX WORKING CONDITIONS :

- Max inlet pressure and temperature : see leaflet n° 101/VP
- Valve sizing : see leaflet n° 100/VP

ON REQUEST :

- PTFE/GR soft seal ≤ 190°C class VI°
- PTFE soft seal ≤ 150°C class VI°
- Lapping on seat and plug class V°
- Stellite (degree 6°) on seat and plug and guide bush
- Reduced bore (see below table)
- Pneumatic pilot positioner 3-15 psi...3-9 psi...9-15 psi
- Electro-pneumatic pilot positioner 4-20 mA...4-12 mA...12-20 mA
- Air filter regulator
- Proximity limit switches
- 3-way solenoid valve
- Lubrificator on finned bonnet for temperatures ≥ 250 °C
- Top-work manual handwheel

Kv = metric unit (flowrate in m3/h with 1 bar of differential pressure)

Plug	DN 65		DN 80		DN 100	
	Ø 2.1/2"		Ø 3"		Ø 4"	
Full bore	Ø 2.1/2"		Ø 3"		Ø 4"	
CV	56.79		75.31		129.91	
KV	48.44		64.24		110.81	
CV	(Ø 2") *	40.82	(Ø 2.1/2")	56.79	(Ø 3")	75.31
KV	(Ø 2") *	34.82	(Ø 2.1/2")	48.44	(Ø 3")	64.24
CV	(Ø 1.1/2") *	24.15	(Ø 2") *	40.82	(Ø 2.1/2")	56.79
KV	(Ø 1.1/2") *	20.60	(Ø 2") *	34.82	(Ø 2.1/2")	48.44
CV	(Ø 1.1/4") *	16.77	(Ø 1.1/2") *	24.15	(Ø 2") *	40.82
KV	(Ø 1.1/4") *	14.30	(Ø 1.1/2") *	20.60	(Ø 2") *	34.82

* Integral plug version with simple cage only (see leaflet 2200AD/E)

CONFLOW s.p.a.

COMPANY
WITH QUALITY SYSTEM
CERTIFIED BY DNV
ISO 9001

Via Lecco, 69/71
20041 AGRATE BRIANZA (MI)
Tel. 039/651.705 - 650.397
Fax 039/654.018
e-mail:sales@conflo.it
www.conflo.it

Maximum permissible pressure drops in Kg/cm² (fluid opens) Strokes in mm – Signals in psi


Actuator type	signal psi	DN 65	DN 80	DN 100
		stroke 28	stroke 28	stroke 28
T310	3-15 psi	80	64	32
	6-30 psi	200	160	80
T400	3-15 psi	118	94	47
	6-30 psi	295	236	118
T500	3-15 psi	197	158	79
	6-30 psi	493	395	197

1. The values given are referred to the force of actuator and they can be used within the limit of the body rating
2. The actuator DELTA-PI (PRESSURE DROPS with CLOSED VALVE) given in the column 3-15 psi are obtained with a thrust of 18 psi
3. The actuator DELTA-PI (PRESSURE DROPS with CLOSED VALVE) given in the column 6-30 psi are obtained with a thrust of 30 psi
4. For the reduced passage valve consider the DELTA-PI given in the right column.

COMPONENTS LIST AND MATERIALS

COMPONENT LIST		MATERIALS
1.	Body	1. See note (1) at pag.1
2.	seat	2. AISI 316 stainless steel
5.	Piston plug with lower ring and upper tight	5. AISI 316 st.st.+ sinterized graphite and FKM tight
5a	Internal Simple Cage	5a AISI 316 stainless steel
5b	External Double Cage	5b AISI 316 stainless steel
6.	Stem	6. AISI 316 stainless steel
7.	Bonnet	7. See notes (1) (2) at pag.1
8.	"O" Ring	8. Viton FPM 70
9.	Body gaskets	9. Europil WS 3640 or PTFE
9a.	Upper internal cage gasket	9a. WS 3640/C-4500 or PTFE
9b.	Upper external cage gasket	9b. WS 3640/C-4500 or PTFE
9c.	Lower internal cage gasket	9c. WS 3640/C-4500 or PTFE
9d.	Lower external cage gasket	9d. WS 3640/C-4500 or PTFE
10.	Packing spring	10. AISI 302 stainless steel
11.	Packing washer	11. AISI 304 stainless steel
12.	Packing rings	12. See note (3) at pag.1
13.	Internal "O" ring	13. Viton FPM 70
14.	External "O" ring	14. Viton FPM 70
15.	Packing adjusting nut	15. AISI 303 stainless steel
16.	Stud-bolts	16. Galvanized steel
17.	Body locknuts	17. DIN 934 galvanized steel
18.	Yoke	18. GGG50 spheroidal c. iron
19.	Travel indicator plate	19. Polycarbonate
20.	Position indicator nuts	20. DIN 936 galvanized steel
21.	Position indicator	21. Aluminium
22.	Diaphragm rod	22. AISI 303 stainless steel
23.	"O" ring	23. NBR
24.	Airtight	24. NBR
25.	Yoke gasket	25. Cork – rubber
26.	Lower diaphragm casing	26. P11 steel
27.	Yoke locknuts	27. DIN 933 galvanized steel
28.	Diaphragm spacer	28. Galvanized steel
29.	Diaphragm	29. EPDM 70
30.	Diaphragm plate	30. P01 steel
31.	Springs	31. C98 UNI 3823
32.	Diaphragm bush	32. AISI 303 stainless steel
33.	Diaphragm locknut	33. ISO 7380 galvanized steel
34.	Diaphragm casing bolts	34. DIN 934 galvanized steel
35.	Upper diaphragm casing	35. P11 steel
36.	Diaphragm casing locknuts	36. DIN 933 galvanized steel

DIMENSIONI in mm.

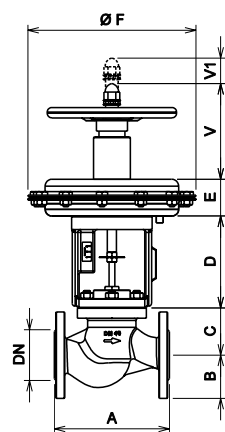

DN	Ø	A	B	C- Bonnet			D	V	V1	Actuatore	E	Ø F
				Std	Finned	Bellows						
65	2.1/2"	290	92.5	111	309	309	160	166	28	310	95	336
80	3"	310	100	135	333	333	160	166	28	400	119	408
100	4"	350	118	160	363	363	204	166	28	500	119	520